

MAGNETIC DOOR SEALS 2x2m

JOINTS DE PORTES AIMANTES 2x2m

Functionality

Magnetic door seals intended for sealing between glass or acrylic shower doors 5 to 8 mm thick.



Technical characteristics

Characteristics	Specifications
Appearance	Transparent PVC
Length	2 m
Suitable for	Door from 5 to 8 mm


Plans

Door thickness: 5 to 6 mm

Door thickness: 7 to 8 mm

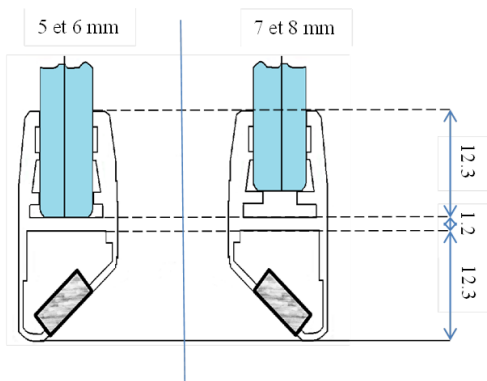


DOOR 90°



DOOR 180°

Nominal space required between the two doors:

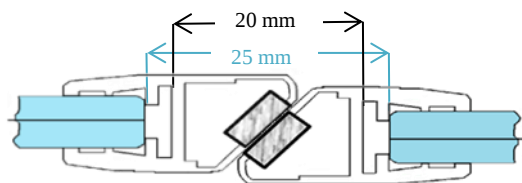

20mm : 5 to 6 mm thick doors

25mm : 7 to 8 mm thick doors

Use

Preparation

- If necessary, remove the old seal, remove traces of glue or silicone, clean any residues.
- Measure the size of your door, spot the inside side of the shower.
- Carry it over the joint, cut the rigid part with a cutter or a thin saw, and the soft part at the scissor or cutter.

Instructions for use

- 6 to 8 mm doors: Clips or drag the seal along the door to the desired location in respecting the sense of the magnet in relation to the inside side of the shower.
- Repeat on the second door
- 5 mm doors: Apply SILICONE TOUS SUPPORTS Translucide or JOINT & FIX Cristal beforehand clip or drag the seal along the door to the desired location, respecting the direction of the magnet in relation to the inside side of the shower.
- Repeat on the second door.

Safety precautions

The Material Safety Data Sheet is available on the Internet on www.quickfds.com or on www.geb.fr .

If the product is subject to detergent regulation : Component list available on request at reach@geb.fr

If the product is subject to biocide regulation or if it contains a biocide to protect it : Consult the Material Safety Data Sheet - Please use the products responsibly.

Tip

**We recommend placing the joints for 1 hour at room temperature before setting up.
It may be easier to work on disassembled doors.**

Storage

Store at a temperature between -5°C and +40°C.

The expiry date on packaging is for unopened product stored at 20°C in normal hygrometry conditions.

Packaging and waste sorting

Refer to the information on the product and to the applicable local regulations.

The information contained on the technical datasheet is provided in all good faith and results from measurements made in our laboratory. Given the number of materials, differences in quality and diversity of working methods, we recommend that users perform tests prior to application under actual conditions of use.

This document may be amended in keeping with product development and the state of our knowledge without prior notice and therefore it is recommended to check on <http://www.geb.fr> that you have the latest version before use.